# Commercial Duct Ventilation Centrifugal Fan HVAC Cabinet Type

### **Basic Information**

Place of Origin: China FoshanBrand Name: Available for ODM


Certification: CE
Model Number: DT18-61
Minimum Order Quantity: 1

• Price: Contact Us

Packaging Details: Carton packaging 1 units per carton

• Delivery Time: 3-8 work days

Payment Terms: T/TSupply Ability: 5000



## **Product Specification**

Applicable Industries: Hotels, Building Material Shops, Machinery

Repair Shops, Food & Beverage Factory, Restaurant, Retail, Food Shop, Food &

Beverage Shops

• Electric Current Type: AC

Provided:

Place Of Origin: Guangdong, China

• Voltage: 220/380V


• Customized Support: OEM, ODM, OBM

Blade Material: Cast IronMounting: Duct FanWarranty: 3 Year

Fan Type: Centrifugal Duct Fan
Cover Material: Steel With Powder Coated
Installation: Ceiling Mounting With Ducting



## More Images



## **Product Description**

#### **Features**


#### High quality components

Apply selected pure copper motor with low noise and high speed, with reliable performance, and the experimental test runs continuously for more than 8000 hours without failure.




#### **Excellent performance**

Equipped with aluminum alloy dynamic balance wind wheel and soundproof sponge air duct, stable operation, large air volume and strong wind pressure.

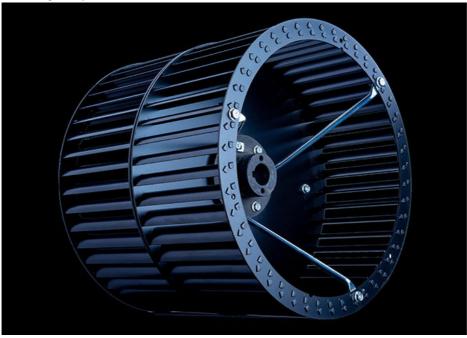


#### **Durable material**

The whole cabinet is thick galvanized sheet, which is anti-corrosive and anti-rust, durable.

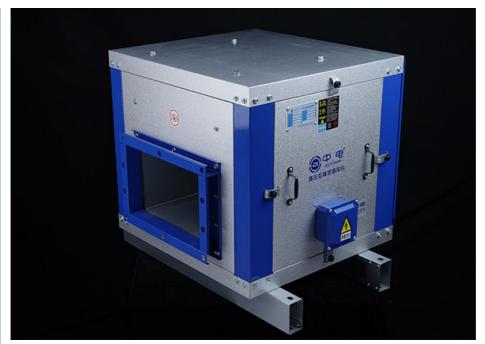

#### **Humanized design**

Two sides opening design makes it more convenient to repair and replace the filter. Special outlet is easy connection for ducting.

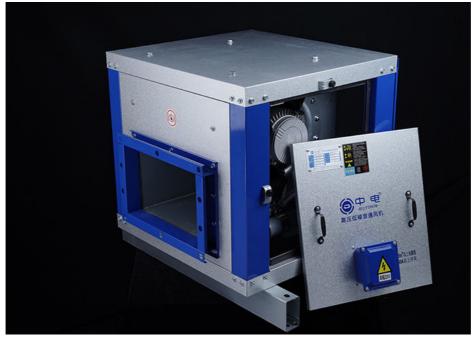


#### Complete series

The specifications are complete, and it is better to select and configure for customers according to the different needs of different places. Filter boxes can be additionally configured. Suitable for various industrial and mining enterprises, large warehouses, large conference halls, overall workshops, hotels, large shopping malls and other places.

## **Product Performance Specifications**

Model number	Voltage	Ffrequen cy	Rotating speed	Air volume	Voltage	Noise	Power	Weight
	(V)	(Hz)	(r/ min)	(m³/h)	( Pa)	(dB)	(W)	( kg)
DT11-36	220/380	50	1450	3600	562	57	1.1	49
DT13-48	220/380	50	1450	4800	623	63	1.5	58
DT18-61	220/380	50	1450	6100	673	68	2.2	70
DT25-81	220/380	50	1450	8100	781	69	3	79
DT32-100	220/380	50	1450	10000	810	75	3.8	84
DT42-120	380	50	1450	12000	830	78	5	100

## **Product Dimensions**



## **Product Dimensions and Specifications**

Unit: mm

Model number	А	B(Length)	C(Height)	D(Width)	Air Inlet (Inner Diameter)		Air Outlet (Inner Diameter)		Flange
					1	H(Height)	(Length)	K(Length)	Thickness
DT11-36	560	660	613	750	467	428	250	305	30×30
DT13-48	570	668	650	780	497	460	210	335	30×30
DT18-61	620	718	705	860	580	515	235	355	30×30
DT25-81	650	748	740	910	630	550	250	380	30×30
DT32-100	650	748	740	910	630	550	250	380	30×30
DT42-120	725	823	815	962	679	625	280	355	30×30
DT48-150	750	848	815	1000	717	625	380	405	30×30
DT55-200	780	879	840	1030	747	650	380	415	30×30

© ZhongDian Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd.







**zd-fan.com** 

Xizi Industrial Zone, Lishui Town, Nanhai District, Foshan City, Guangdong Province, China