Two Speed Ventilation Centrifugal Inline Duct Fans Mixed Flow Silent Weatherproof

Basic Information

Place of Origin: China FoshanBrand Name: Available for ODM

Certification: CEModel Number: DJT10-20

Minimum Order Quantity:

• Price: Contact Us

Packaging Details: Carton packaging 1 units per carton

• Delivery Time: 3-8 work days

Payment Terms: T/TSupply Ability: 5000



Product Specification

• Applicable Industries: Hotels, Garment Shops, Building Material

Shops, Manufacturing Plant, Machinery Repair Shops, Food & Beverage Factory, Farms, Restaurant, Home Use, Retail, Food Shop, Printing Shops, Construction Works, Energy & Mining, Food & Beverage Shops,

Advertising C

• Electric Current Type: AC

Mounting: Duct Fan

After-sales Service Online Support

Provided:

Place Of Origin: China Foshan

Customized Support: OEM
Blade Material: Plastic
Voltage: 220V
Warranty: 1 Year
Product Name: Ventilation



More Images



Product Description

Product Applications

The inclined flow fan excels in the field of ventilation and air exchange. In factory workshops, it quickly replaces stale air, eliminating odors and harmful gases to create a healthy working environment for employees. In warehouses, it helps prevent goods from dampness and mold, ensuring storage quality. Whether in large industrial sites or small commercial spaces, the inclined flow fan is a powerful ally for ventilation.



Product Fan Wheel

The impeller design of the inclined flow fan has numerous advantages. Its unique shape and structure efficiently propel air movement. The impeller is designed based on advanced aerodynamic principles, reducing air resistance and enhancing the fan's efficiency. Additionally, the materials used for the impeller are robust and durable, able to withstand the pressure generated by high-speed rotation, ensuring the long-term stable operation of the fan.


Installation-Friendly

The inclined flow fan stands out among various ventilation devices due to its easy installation features. Firstly, its structure is straightforward, with minimal complex components, allowing installers to quickly grasp its design and assemble it with ease. The connections between parts are typically simple, requiring no specialized skills, which significantly reduces both installation difficulty and time costs.

Product Specifications

Model number	Power	Airflow	Static Pressure	Noise Level	Duct Diameter	Quantity per Carton	Net Weight
	(W)	(m5/h)	(Pa)	(dB)	(mm)	(Unit Box)	(kg)
DJT10-20	30/26	200/170	183/130	30/25	100	6	1.8
DJT15-54	48/40	540/384	330/280	40/35	150	6	2.2
DJT20-90	76/60	900/820	380/310	50/45	200	6	2.7
DJT25-170	173/152	1700/1200	550/480	56/50	250	1	18
DJT31-230	350/260	2300/1900	650/500	60/55	315	1	20

Product Dimension Diagram

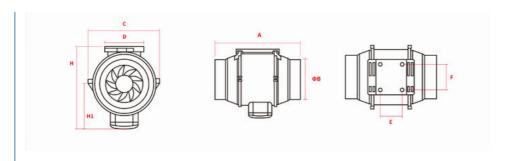

Product Size Specifications

Model number	Α	В(Ф)	С	D	E	F	Н	H1
dJT10-20	300	100	100	214	62	60	182	95
DJT15-54	293	150	120	237	72	70	211	110
DJT20-90	304	200	140	258	78	85	235	124
DJT25-170	367	250	317	208	120	95	365	196
DJT31-230	450	315	360	255	120	95	410	215

© ZhongDian Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd.







Zd-fan.com

Xizi Industrial Zone, Lishui Town, Nanhai District, Foshan City, Guangdong Province, China