

## Mixed Flow Inline Duct Fans Ventilation Circular Extractor 220V

### Our Product Introduction

for more products please visit us on [zd-fan.com](http://zd-fan.com)

### Basic Information

- Place of Origin: China Foshan
- Brand Name: Available for ODM
- Certification: CE
- Model Number: DJT31-230
- Minimum Order Quantity: 1
- Price: Contact Us
- Packaging Details: Carton packaging 1 units per carton
- Delivery Time: 3-8 work days
- Payment Terms: T/T
- Supply Ability: 5000



### Product Specification

- Applicable Industries: Building Material Shops, Manufacturing Plant, Retail, Construction Works
- Electric Current Type: AC
- After-sales Service Provided: Online Support
- Place Of Origin: China Foshan
- Voltage: 220V
- Customized Support: OEM
- Blade Material: Plastic
- Mounting: Duct Fan
- Model Number: DJT31-230
- Warranty: 1 Year
- Product Name: Plastic Duct Fan
- Application: Industrial Ventilation
- Highlight: Ventilation Inline Duct Fans, 220V Inline Duct Fans, 220V inline extractor fan



### More Images



Product Description

Product Usage

During construction, the axial flow fan aids ventilation by quickly exhausting dust and harmful gases generated on-site, accelerating the drying process and creating favorable conditions for subsequent work. Additionally, it helps lower the temperature at the construction site, thereby enhancing workers' efficiency.



Product Impeller

The design of the axial flow fan impeller focuses on energy efficiency and environmental protection. By optimizing the structure and performance of the impeller, energy consumption is reduced, which lowers operating costs. Additionally, the low operational noise of the impeller minimizes noise pollution in the environment. This aligns with contemporary society's demands for energy conservation and sustainability, providing users with increased economic and social benefits.


Easy to Install

The design of the axial flow fan fully considers ease of installation. For example, its electrical connection is straightforward, with a logical wiring layout that allows installation personnel to quickly complete the connections, avoiding complex wiring processes. Additionally, the fan's mounting method is simple, typically using common fasteners like bolts for secure attachment.

Product Specifications

Model number	Power	Airflow	Static Pressure	Noise Level	Duct Diameter	Quantity per Carton	Net Weight
	(W)	(m5/h)	(Pa)	(dB)	(mm)	(Unit Box)	(kg)
DJT10-20	30/26	200/170	183/130	30/25	100	6	1.8
DJT15-54	48/40	540/384	330/280	40/35	150	6	2.2
DJT20-90	76/60	900/820	380/310	50/45	200	6	2.7
DJT25-170	173/152	1700/1200	550/480	56/50	250	1	18
DJT31-230	350/260	2300/1900	650/500	60/55	315	1	20


Product Dimension Diagram

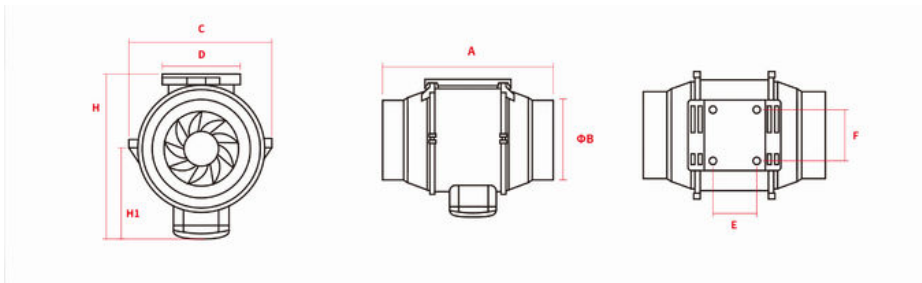

## Product Dimension Specifications

Model number	A	B(Φ)	C	D	E	F	H	H1
dJT10-20	300	100	100	214	62	60	182	95
DJT15-54	293	150	120	237	72	70	211	110
DJT20-90	304	200	140	258	78	85	235	124
DJT25-170	367	250	317	208	120	95	365	196
DJT31-230	450	315	360	255	120	95	410	215

 **ZhongDian** Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd.

 0085246403891

 sales001@zd-fan.com

 zd-fan.com

Xizi Industrial Zone, Lishui Town, Nanhai District, Foshan City, Guangdong Province, China