Remote Control Metal Sleek White Air Curtain For Double Door

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:

Our Product Introduction

for more products please visit us on zd-fan.com

- Packaging Details:
- Delivery Time:
- Payment Terms: T/T
- Supply Ability:



Product Specification

- Applicable Industries:
- After-sales Service Provided:
- Place Of Origin:
- Voltage:
- Customized Support:
- Installation Type:
- Model Number:
- Warranty:
- Product Name:
- Dimension(L*W*H):
- Certification:
- MOQ:
- Funtion:
- Air Flow:

Double Door Online Support

China Foshan

CE

1

5000

FM3520

Contact Us

3-8 work days

Available for ODM

Carton packaging 1 units per carton

China Foshan 220V / 50hz OEM / ODM Split System FM3520 2 Year Air Curtain For Double Door 2000 * 207 * 175 Mm CE

- 1 Set
- Low Noise, Energy Saving 4000 M³/h



More Images





Product applications

Air curtains are advanced, high-velocity fans that establish an imperceptible barrier of air across doorways. This innovative solution effectively segregates indoor and outdoor environments while maintaining distinct temperature zones. By preventing the loss of conditioned air to the outside, air curtains play a pivotal role in energy conservation. Additionally, they act as a formidable shield against dust infiltration, smoke penetration, and the entry of flying insects, ensuring a cleaner and more controlled indoor atmosphere.

Guide louver

New guide louver design, can be adjusted according to different wind direction.



High Quality Ball Bearing

The use of high-quality ball bearings instead of hydraulic bearings, longer life, to ensure that the motor runs more smoothly and quietly.




100%Copper Wire Motor Greater torque, higher efficiency, more compact structure, built-in overheating protection device, quality assurance



Low Noise Multi-blade Impeler Injection molded, integrated windmill, light blade, high strength, low noise



Product Dimensions Diagram

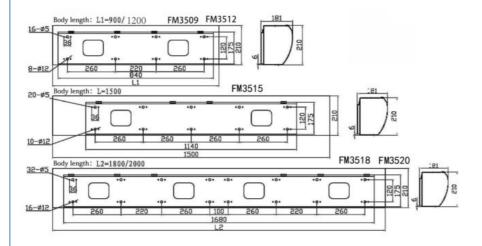

product specifications

Model	Rated voltage (V)	Rated frequency (Hz)	Powe (W)	Wind speed (m/s)	Air volume (m3/h)	Nois e dB(A)	Installatio n height (m)	Dimensio ns (mm)	Net weight (kg)
FM3509	220	50	135/1 15	11-13	2350	55	3.0-3.5	920X207 X175	11.0
FM3509 Y	220	50	135/1 15	11-13	2350	55	3.0-3.5	920X207 X175	11.0
FM3512	220	50	175/1 64	11-13	3050	57	3.0-3.5	1200X207 X175	13.0
FM3512 Y	220	50	175/1 64	11-13	3050	57	3.0-3.5	1200X207 X175	13.0
FM3515	220	50	232/2 10	11-13	3950	59	3.0-3.5	1500X207 X175	16.0

FM3515 Y	220	50	232/2 10	11-13	3950	59	3.0-3.5	1500X207 X175	16.0
FM3518	220	50	275/2 18	11-13	4500	62	3.0-3.5	1800X207 X175	22.0
FM3518 Y	220	50	275/2 18	11-13	4500	62	3.0-3.5	1800X207 X175	22.0
FM3520	220	50	293/2 40	11-13	4700	64	3.0-3.5	2000X207 X175	24.0
FM3520 Y	220	50	293/2 40	11-13	4700	64	3.0-3.5	2000X207 X175	24.0

Company Profile

Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd. originated from Foshan Nanhai Zhongxing Hardware Electrical Appliance Factory (with brands including Zhongdian Fresh Air and Zhongdian Xinke). The company specializes in the research, development, and manufacturing of DKT external rotor air conditioning fans (snail-type and square-type), mixed flow booster duct fans, KTF stainless steel external rotor centrifugal air handling units, air curtains, purifying low-noise fans, and centrifugal low-noise ventilation equipment. It is a modern national high-tech enterprise focusing on EC frequency conversion digital energy-saving fans. The manufacturing base is located in Foshan, Guangdong Province. Since its establishment in 1997, the company has adhered to a quality-centric approach and actively developed its proprietary brand, Zhongdian. It has successively passed ISO9001, CE, and national CCC mandatory product certifications and has obtained multiple utility model patents. The company ranks among the top in the industry in terms of comprehensive strength and brand influence.


Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd. operates under the philosophy of "Technological Innovation, Respect for Talent, Reform and Innovation, Pursuit of Excellence." The company has introduced over ten advanced automation devices and possesses a testing laboratory that complies with the national standard GB/T 1236-2017 "Performance Testing of Industrial Fans with Standardized Ducts," along with a 5S management system. It emphasizes user experience with its products and focuses on continually meeting customer needs. Through relentless efforts, the company has become a leader in the fresh air system market.

The company adheres to the principle of "Quality First, Quantity Second," earning trust from users across the country with its excellent quality and outstanding performance. It strives to enhance competitive advantages in pre-sales, sales, and after-sales services, and continues to uphold the creed of "Customer First, Service Excellence." The company is dedicated to continuous product and service iteration, aiming to become a leading brand in high-end fresh air system equipment.



EXHIBITION SHOW

We have strong sales network system and can undertake a large number of OEM/ODM orders.. Our products are mainly exported to Europe, America, the Middle East and Southeast Asia, and old customers account for up to 30%. Our products are made of pure copper tubes and use Yongan motors, has the characteristics of high quality, super mute, comfortable style and reasonable price. We have independent R & D and design team that can meet any comments and conditions you have on product customization and technology research and development.

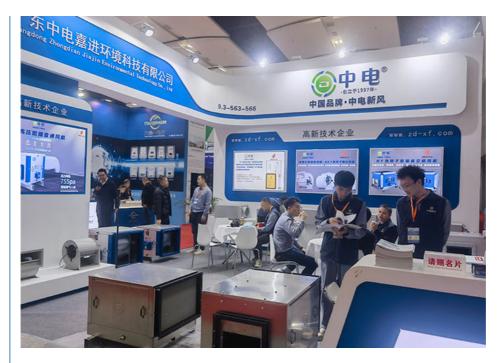


The team

Our team will also carry out some outdoor group building activities to enhance the cohesion of employees and devote the mselves to work with more enthusiasm.



Showcase of Factory Capabilities

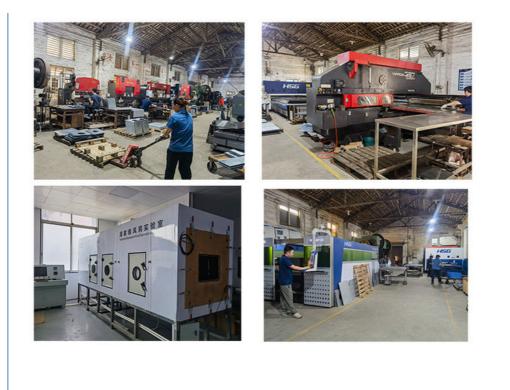

© ZhongDian Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd.

0085246403891

Sales001@zd-fan.com C zd-fan.com

Xizi Industrial Zone, Lishui Town, Nanhai District, Foshan City, Guangdong Province, China