Dual-Speed Ventilation Fans Inline Duct & Mixed Flow Silent & Weatherproof Centrifugal Performance

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- · Packaging Details:
- Delivery Time: 3-8 work days
- Payment Terms: T/T
- Supply Ability:



Product Specification

- Applicable Industries: Advertising C • Electric Current Type: AC Duct Fan Mounting: After-sales Service Online Support Provided:
 - Place Of Origin:
 - Customized Support:
 - Blade Material:
 - Voltage:
 - Warranty:
 - Product Name:

Hotels, Garment Shops, Building Material Shops, Manufacturing Plant, Machinery Repair Shops, Food & Beverage Factory, Farms, Restaurant, Home Use, Retail, Food Shop, Printing Shops, Construction Works, Energy & Mining, Food & Beverage Shops,

China Foshan

CE

1

5000

DJT10-20

Contact Us

Available for ODM

Carton packaging 1 units per carton

China Foshan

Plastic

220V 1 Year

Ventilation

- OFM





More Images



Product Applications

Inclined flow fans excel in ventilation and air exchange across various settings. In factory workshops, they swiftly replace stale air, eliminating odors and harmful gases to create a healthier working environment for employees. In warehouses, these fans help prevent goods from dampness and mold, ensuring superior storage quality. Whether in large industrial sites or small commercial spaces, inclined flow fans are a powerful ally for effective ventilation.



Product Fan Wheel

The impeller design of the inclined flow fan offers numerous benefits. Its unique shape and structure efficiently propel air movement, while its advanced aerodynamic design minimizes air resistance and enhances overall efficiency. Constructed from robust and durable materials, the impeller withstands high-speed rotation pressures, ensuring long-term stable operation.


Ease of Installation

Inclined flow fans are distinguished by their user-friendly installation features. Their straightforward structure, comprising minimal complex components, allows installers to quickly understand and assemble the unit with ease. The simple connections between parts require no specialized skills, significantly reducing both installation difficulty and time costs.

Product Specifications

Model number	Power	Airflow	Static Pressure	Noise Level	Duct Diameter	Quantity per Carton	Net Weight
	(W)	(m5/h)	(Pa)	(dB)	(mm)	(Unit Box)	(kg)
DJT10-20	30/26	200/170	183/130	30/25	100	6	1.8
DJT15-54	48/40	540/384	330/280	40/35	150	6	2.2
DJT20-90	76/60	900/820	380/310	50/45	200	6	2.7
DJT25-170	173/152	1700/1200	550/480	56/50	250	1	18
DJT31-230	350/260	2300/1900	650/500	60/55	315	1	20

Product Dimension Diagram

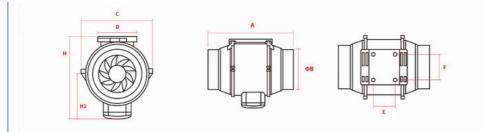

Product Size Specifications

Model number	A	В(Ф)	С	D	E	F	Н	H1
dJT10-20	300	100	100	214	62	60	182	95
DJT15-54	293	150	120	237	72	70	211	110
DJT20-90	304	200	140	258	78	85	235	124
DJT25-170	367	250	317	208	120	95	365	196
DJT31-230	450	315	360	255	120	95	410	215

SchongDian Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd.

S 0085246403891 Sales001@zd-fan.com

n 🙋 zd-fan.com

Xizi Industrial Zone, Lishui Town, Nanhai District, Foshan City, Guangdong Province, China