

220V Metal Split Duct Exhaust Fan 500RPM Energy Saving

Our Product Introduction

for more products please visit us on zd-fan.com

Basic Information

- Place of Origin: Guangdong, China
- Certification: CCC/CE/ISO9001
- Model Number: DPT10-15
- Minimum Order Quantity: 1
- Price: \$13-18



Product Specification

- Voltage: 220V
- Speed: 500RPM
- Motor Type: AC Motor
- Blade Material: Metal
- Mounting Type: Duct Fan
- Model Number: DPT10-15
- Material: Metal
- Supply Ability: 20000/month
- Customized Support: OEM, ODM
- Product Type: Cabinet Centrifugal Fan
- Logo Customization: Accept Customized Logo
- Payment Methods: TT, L/C, D/A, D/P, Western Union, MoneyGram
- After-sales Support: Video Technical Support
- Online Service: 24-hour Online Service
- Packing: Carton & Wooden Box



More Images



Product Description

220V Energy Saving Square Vertical Pipe Duct Exhaust Fan

Key Features

- Durable metal construction for long-lasting performance
- Low noise operation for minimal disturbance
- Energy efficient design reduces power consumption
- High performance 220V AC motor
- 500 RPM speed for optimal airflow
- Professional service with 24-hour online support

Product Specifications

Attribute	Value
Model Number	DPT10-15
Customization	OEM, ODM supported
Blade Material	Metal
Mounting Type	Duct Fan
Voltage	220V
Speed	500RPM
Motor Type	AC Motor
Warranty	1 Year
Packaging	Carton & Wooden box
Supply Capacity	20,000 units/month



VENTILATION EQUIPMENT

20+ YEARS OF PROFESSIONAL INDUSTRY EXPERIENCE





20+ YEARS
With full-chain production capabilities from components to complete systems.



OEM&ODM
Customized solutions for diverse climates and architectures.



TRANSPORT
Fast delivery in cooperation with several logistics companies.




FAVORABLE PRICE
Customers can enjoy the company's long-term technical advisory services.

PRODUCT PERFORMANCE SPECIFICATIONS

Model number	Voltage/frequency	Power	Air volume	Static pressure	Noise	Rotating speed	Installation Information		Package dimensions	Weight
	(V/Hz)	(W)	(m³/h)	(Pa)	(dB)	(r/min)	Nozzle diameter (mm)	Usage area (m²)	(mm)	(kg)
DPT10-15	220/50	28	150	65	32	1290	Φ100	6-10	240x200x225	2.5
DPT10-25	220/50	43	250	110	35	1560	Φ100	10-17	240x200x225	2.5
DPT15-30	220/50	48	300	140	43	1000	Φ150	10-20	340x260x340	4.2
DPT15-45	220/50	56	450	140	45	1206	Φ150	20-25	340x260x340	4.2
DPT20-50	220/50	95	500	180	46	1000	Φ200	25-28	390x360x400	6.4
DPT20-60	220/50	100	600	180	46	1200	Φ200	28-33	390x360x400	6.4
DPT20-70	220/50	110	700	190	48	1100	Φ200	33-38	390x360x400	7.5
DPT20-80	220/50	120	800	200	48	1200	Φ200	38-42	390x360x400	7.5
DPT20-90	220/50	133	900	220	50	1000	Φ200	42-48	390x360x400	7.5
DPT20-120	220/50	220	1200	230	52	1200	Φ200	48-58	390x360x400	8.4
DPT20-150	220/50	225	1500	280	53	1500	Φ200	60-70	390x360x400	8.4
DPT25-210	220/50	302	2100	320	65	1250	Φ250	80-100	410x365x400	9.5

PRODUCT DIMENSIONS DIAGRAM

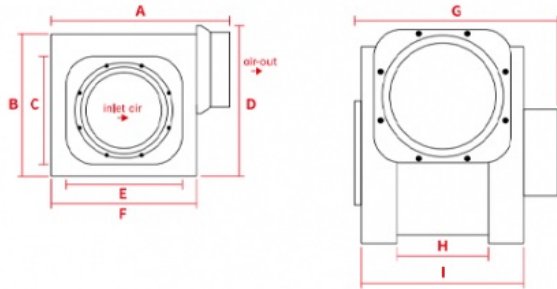

PRODUCT DIMENSIONS

Model number	unit:mm									Air Port d1=d2
	A(L)	B	C	D (H)	E	F	H (W)	H	I	
DPT10-15	220	180	120	197	120	180	180	83	144	100
DPT10-25	220	180	120	197	120	180	180	83	144	100
DPT15-30	303	280	188	280	157	250	226	118	184	150
DPT15-45	303	280	188	280	157	250	226	118	184	150
DPT20-50	350	300	190	330	160	300	311	165	235	200
DPT20-60	350	300	190	330	160	300	311	165	235	200
DPT20-70	350	300	190	330	160	300	311	165	235	200
DPT20-80	350	300	190	330	160	300	311	165	235	200
DPT20-90	350	300	190	330	160	300	311	165	235	200
DPT20-120	350	300	190	330	160	300	311	165	235	200
DPT20-150	350	300	190	330	160	300	311	165	235	200
DPT25-210	390	335	190	370	160	310	320	185	255	250

Why Choose Our Exhaust Fans

Since 1997, we have maintained a strict quality control process and developed our proprietary brand. Our products have passed ISO9001, CE, and CCC certifications, with multiple utility model patents. We rank among the top in the industry for comprehensive strength and brand influence.

Customization Services

We support non-standard designs including special voltage requirements, custom flange interfaces, and personalized LOGO options.

Quality Assurance

Every component undergoes thorough inspection before production. Our manufacturing process follows strict procedures, with comprehensive testing before shipment. Products are carefully packaged to ensure safe transportation.

Frequently Asked Questions

Q: Why choose us?

A: We combine decades of experience with rigorous quality standards, holding multiple certifications and patents in the industry.

Q: What customization options are available?

A: We support custom voltage requirements, flange interfaces, and branding options.

Q: How do you ensure product quality?


A: Through comprehensive pre-production checks, strict manufacturing processes, and multiple testing stages before shipment.

Q: What after-sales services do you provide?

A: 24-hour technical support, usage guidance, and regular follow-ups to ensure optimal product performance.

Q: What is your minimum order quantity?

A: We accept orders of any size, from single units to bulk purchases.

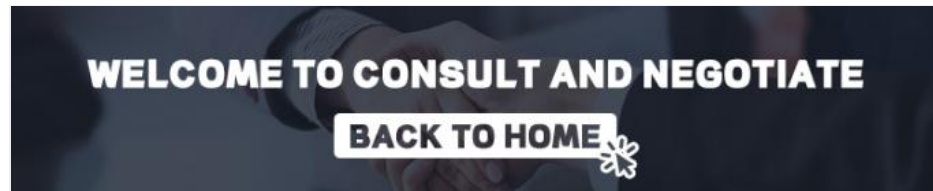

 **ZhongDian** **Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd.**



0085246403891



sales001@zd-fan.com



zd-fan.com

Xizi Industrial Zone, Lishui Town, Nanhai District, Foshan City, Guangdong Province, China