

220V Metal Split Duct Exhaust Fan 500RPM Low Noise

Our Product Introduction

for more products please visit us on zd-fan.com

Basic Information

- Place of Origin: Guangdong, China
- Certification: CCC/CE/ISO9001
- Model Number: DPT10-15
- Minimum Order Quantity: 1
- Price: \$13-18



Product Specification

- Voltage: 220V
- Speed: 500RPM
- Blade Material: Metal
- Mounting Type: Duct Fan
- Model Number: DPT10-15
- Case Material: Metal
- Customized Support: OEM, ODM
- Supply Ability: 20000/month
- Product Type: Split Duct Exhaust Fan
- Reversible Function: Yes
- Noise Level: Low
- Energy Efficiency: Energy Saving
- Performance Level: High Performance
- Logo Customization: Accept Customized Logo
- Special Voltage Support: Yes



More Images



Product Description

220V Metal Case Air Pipe Smoke Extractor In-line Duct Centrifugal Exhaust Reversible Split Duct Exhaust Fan

Product Specifications

Attribute	Value
Customized Support	OEM, ODM
Blade Material	Metal
Mounting	Duct Fan
Voltage	220V
Speed	500RPM
Warranty	5 years
After-sales Service	Video technical support
Material	Metal
Product Name	Split Duct Exhaust Fan
Feature	Durable, Low Noise, Energy Saving, High Performance
Service	24-hour online service
Advantage	Professional Service
Quality	High Quality
Packing	Carton & Wooden box
Supply Ability	20000/month
Port	Guangzhou
Payment	TT, L/C, D/A, D/P, Western Union, MoneyGram

Product Details



VENTILATION EQUIPMENT

20+ YEARS OF PROFESSIONAL INDUSTRY EXPERIENCE





20+ YEARS
With full-chain production capabilities from components to complete systems.



OEM&ODM
Customized solutions for diverse climates and architectures.



TRANSPORT
Fast delivery in cooperation with several logistics companies.



FAVORABLE PRICE
Customers can enjoy the company's long-term technical advisory services.



VENTILATION EQUIPMENT

— 20+ YEARS OF PROFESSIONAL INDUSTRY EXPERIENCE —





20+ YEARS
With full-chain production capabilities from components to complete systems.



OEM&ODM
Customized solutions for diverse climates and architectures.



TRANSPORT
Fast delivery in cooperation with several logistics companies.



FAVORABLE PRICE
Customers can enjoy the company's long-term technical advisory services.

Model number: DPT10-15

Product name: Full Metal Ceiling Fan

Logo: Accept Customized Logo


Payment: TT, L/C, D/A, D/P, Western Union, MoneyGram

Advantage: Professional Service, High Quality

PRODUCT PERFORMANCE SPECIFICATIONS

Model number	Voltage/frequency	Power	Air volume	Static pressure	Noise	Rotating speed	Installation Information		Package dimensions	Weight
	(V/Hz)	(W)	(m ³ /h)	(Pa)	(dB)	(r/min)	Nozzle diameter (mm)	Usage area (m ²)	(mm)	(kg)
DPT10-15	220/50	28	150	65	32	1290	Φ100	6-10	240x200x225	2.5
DPT10-25	220/50	43	250	110	35	1560	Φ100	10-17	240x200x225	2.5
DPT15-30	220/50	48	300	140	43	1000	Φ150	10-20	340x260x340	4.2
DPT15-45	220/50	56	450	140	45	1206	Φ150	20-25	340x260x340	4.2
DPT20-50	220/50	95	500	180	46	1000	Φ200	25-28	390x360x400	6.4
DPT20-60	220/50	100	600	180	46	1200	Φ200	28-33	390x360x400	6.4
DPT20-70	220/50	110	700	190	48	1100	Φ200	33-38	390x360x400	7.5
DPT20-80	220/50	120	800	200	48	1200	Φ200	38-42	390x360x400	7.5
DPT20-90	220/50	133	900	220	50	1000	Φ200	42-48	390x360x400	7.5
DPT20-120	220/50	220	1200	230	52	1200	Φ200	48-58	390x360x400	8.4
DPT20-150	220/50	225	1500	280	53	1500	Φ200	60-70	390x360x400	8.4
DPT25-210	220/50	302	2100	320	65	1250	Φ250	80-100	410x365x400	9.5

PRODUCT DIMENSIONS DIAGRAM

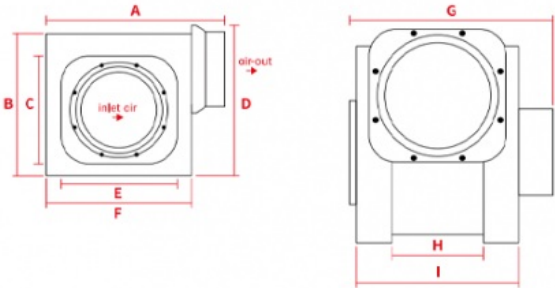

PRODUCT DIMENSIONS


unit:mm

Model number	A(L)	B	C	D (H)	E	F	H (W)	H	I	Air Port d1=d2
DPT10-15	220	180	120	197	120	180	180	83	144	100
DPT10-25	220	180	120	197	120	180	180	83	144	100
DPT15-30	303	280	188	280	157	250	226	118	184	150
DPT15-45	303	280	188	280	157	250	226	118	184	150
DPT20-50	350	300	190	330	160	300	311	165	235	200
DPT20-60	350	300	190	330	160	300	311	165	235	200
DPT20-70	350	300	190	330	160	300	311	165	235	200
DPT20-80	350	300	190	330	160	300	311	165	235	200
DPT20-90	350	300	190	330	160	300	311	165	235	200
DPT20-120	350	300	190	330	160	300	311	165	235	200
DPT20-150	350	300	190	330	160	300	311	165	235	200
DPT25-210	390	335	190	370	160	310	320	185	255	250

PRODUCT PERFORMANCE SPECIFICATIONS

Model number	Voltage/frequency	Power	Air volume	Static pressure	Noise	Rotating speed	Installation Information		Package dimensions	Weight
	(V/Hz)	(W)	(m³/h)	(Pa)	(dB)	(r/min)	Nozzle diameter (mm)	Usage area (m²)	(mm)	(kg)
DPT10-15	220/50	28	150	65	32	1290	Φ100	6-10	240x200x225	2.5
DPT10-25	220/50	43	250	110	35	1560	Φ100	10-17	240x200x225	2.5
DPT15-30	220/50	48	300	140	43	1000	Φ150	10-20	340x260x340	4.2
DPT15-45	220/50	56	450	140	45	1206	Φ150	20-25	340x260x340	4.2
DPT20-50	220/50	95	500	180	46	1000	Φ200	25-28	390x360x400	6.4
DPT20-60	220/50	100	600	180	46	1200	Φ200	28-33	390x360x400	6.4
DPT20-70	220/50	110	700	190	48	1100	Φ200	33-38	390x360x400	7.5
DPT20-80	220/50	120	800	200	48	1200	Φ200	38-42	390x360x400	7.5
DPT20-90	220/50	133	900	220	50	1000	Φ200	42-48	390x360x400	7.5
DPT20-120	220/50	220	1200	230	52	1200	Φ200	48-58	390x360x400	8.4
DPT20-150	220/50	225	1500	280	53	1500	Φ200	60-70	390x360x400	8.4
DPT25-210	220/50	302	2100	320	65	1250	Φ250	80-100	410x365x400	9.5

PRODUCT DIMENSIONS DIAGRAM

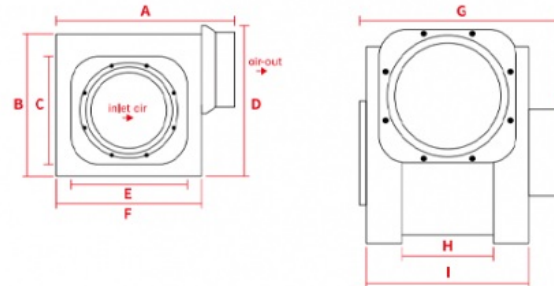

PRODUCT DIMENSIONS

unit:mm

Model number	A(L)	B	C	D (H)	E	F	H (W)	H	I	Air Port d1=d2
DPT10-15	220	180	120	197	120	180	180	83	144	100
DPT10-25	220	180	120	197	120	180	180	83	144	100
DPT15-30	303	280	188	280	157	250	226	118	184	150
DPT15-45	303	280	188	280	157	250	226	118	184	150
DPT20-50	350	300	190	330	160	300	311	165	235	200
DPT20-60	350	300	190	330	160	300	311	165	235	200
DPT20-70	350	300	190	330	160	300	311	165	235	200
DPT20-80	350	300	190	330	160	300	311	165	235	200
DPT20-90	350	300	190	330	160	300	311	165	235	200
DPT20-120	350	300	190	330	160	300	311	165	235	200
DPT20-150	350	300	190	330	160	300	311	165	235	200
DPT25-210	390	335	190	370	160	310	320	185	255	250

Frequently Asked Questions

Q: Why choose us?

A: Since its establishment in 1997, we have adhered to a quality-centric approach and actively developed our proprietary brand, Zhongdian. We have successively passed ISO9001, CE, and national CCC mandatory product certifications and have obtained multiple utility model patents. The company ranks among the top in the industry in terms of comprehensive strength and brand influence.

Q: What are our customized services?

A: We support non-standard design, including special voltage requirements, flange interfaces, custom logos, and more.

Q: How do we guarantee the quality of our products?

A: We inspect every component before production to ensure flawless parts. Our employees strictly follow production processes, and each product undergoes a series of rigorous testing procedures before leaving the factory. The packaging process stabilizes and seals the product securely.

Q: About after-sales service.

A: 1) 24-hour service hotline with professional technicians available to answer product questions; 2) We provide relevant technical guidance based on customer usage; 3) We conduct regular follow-ups to monitor product operation and exchange the latest maintenance and servicing technology.

Q: What's your MOQ?

A: We don't have a minimum order quantity. Whether it's 1 unit or 100 units, we provide the same dedicated support and service.

WELCOME TO CONSULT AND NEGOTIATE

BACK TO HOME



WELCOME TO CONSULT AND NEGOTIATE

BACK TO HOME



 **ZhongDian** **Guangdong Zhongdian Jiajin Environmental Technology Co., Ltd.**



0085246403891



sales001@zd-fan.com



zd-fan.com

Xizi Industrial Zone, Lishui Town, Nanhai District, Foshan City, Guangdong Province, China